



# SGM8772

## High Voltage, High Precision, Dual Differential Comparator with $V_{REF}$

---

### GENERAL DESCRIPTION

The SGM8772 is a dual, high precision differential voltage comparator with a voltage reference and a NAND gate. The device optimized for high voltage operation from 2.8V to 36V single supply. It consumes low supply current without being affected by the supply voltage. Input common mode voltage is 1.5V lower than  $+V_S$ . The SGM8772 has a push-pull output structure without external pull-up resistors. This feature makes it a good choice for applications whose PCB sizes are limited. The SGM8772 also provides one window comparator output.

The SGM8772 is available in a Green MSOP-10 package. It is operated over the  $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$  temperature range.

### FEATURES

- **Single Power Supply**
- **Wide Supply Voltage Range: 2.8V to 36V**
- **Low Supply Current: 420 $\mu\text{A}$  (TYP)**
- **Low Input Offset Voltage: 4mV (MAX)**
- **Low Input Bias Current:  $\pm 20\text{pA}$  (TYP)**
- **Minimum Input Common Mode Voltage:  $-V_S$**
- **Maximum Differential Input Voltage:  $+36\text{V}/-36\text{V}$**
- **Push-Pull Output and Window Comparator Output**
- **Low Output Saturation Voltage**
- **Supports CMOS or TTL Logic**
- **$-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$  Operating Temperature Range**
- **Available in a Green MSOP-10 Package**

### APPLICATIONS

Power System Monitor  
Medical Equipment  
Industrial Application  
Battery Management System


**PACKAGE/ORDERING INFORMATION**

| MODEL   | PACKAGE DESCRIPTION | SPECIFIED TEMPERATURE RANGE | ORDERING NUMBER  | PACKAGE MARKING           | PACKING OPTION      |
|---------|---------------------|-----------------------------|------------------|---------------------------|---------------------|
| SGM8772 | MSOP-10             | -40°C to +125°C             | SGM8772XMS10G/TR | SGM8772<br>XMS10<br>XXXXX | Tape and Reel, 4000 |

**MARKING INFORMATION**

NOTE: XXXXX = Date Code, Trace Code and Vendor Code.

**XXXXX**



Green (RoHS & HSF): SG Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your SGMICRO representative directly.

**ABSOLUTE MAXIMUM RATINGS**

- Supply Voltage, V<sub>S</sub>..... 40V
- Differential Input Voltage, |V<sub>ID</sub>| ..... 40V
- Input Voltage Range ..... -0.3V to (+V<sub>S</sub>) + 0.3V
- Output Voltage, V<sub>OUT</sub>..... -0.3V to (+V<sub>S</sub>) + 0.3V
- Output Voltage, V<sub>REF</sub>..... -0.3V to 5.5V
- Junction Temperature.....+150°C
- Storage Temperature Range ..... -65°C to +150°C
- Lead Temperature (Soldering, 10s).....+260°C
- ESD Susceptibility
- HBM.....2500V
- CDM ..... 1000V

**RECOMMENDED OPERATING CONDITIONS**

- Operating Temperature Range .....-40°C to +125°C
- Power Supply Range .....2.8V to 36V

**OVERSTRESS CAUTION**

Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect reliability. Functional operation of the device at any conditions beyond those indicated in the Recommended Operating Conditions section is not implied.


**ESD SENSITIVITY CAUTION**

This integrated circuit can be damaged if ESD protections are not considered carefully. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because even small parametric changes could cause the device not to meet the published specifications.

**DISCLAIMER**

SG Micro Corp reserves the right to make any change in circuit design, or specifications without prior notice.

**PIN CONFIGURATION**

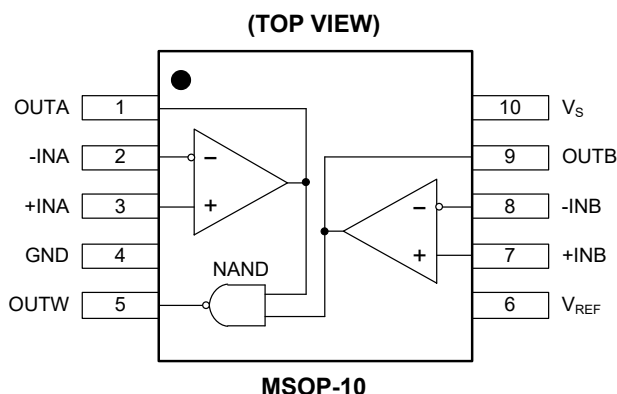

**PIN DESCRIPTION**

| PIN | NAME      | FUNCTION                             |
|-----|-----------|--------------------------------------|
| 1   | OUTA      | Output of Comparator A.              |
| 2   | -INA      | Inverting Input of Comparator A.     |
| 3   | +INA      | Non-Inverting Input of Comparator A. |
| 4   | GND       | Ground.                              |
| 5   | OUTW      | Output of Window Comparator.         |
| 6   | $V_{REF}$ | Reference Output.                    |
| 7   | +INB      | Non-Inverting Input of Comparator B. |
| 8   | -INB      | Inverting Input of Comparator B.     |
| 9   | OUTB      | Output of Comparator B.              |
| 10  | $V_S$     | Power Supply.                        |

**ELECTRICAL CHARACTERISTICS**(At  $T_A = +25^\circ\text{C}$ ,  $V_S = \pm 1.4\text{V}$  to  $\pm 18\text{V}$ , Full =  $-40^\circ\text{C}$  to  $+125^\circ\text{C}$ , unless otherwise noted.)

| PARAMETER                                      | SYMBOL       | CONDITIONS   | TEMP  | MIN    | TYP      | MAX                    | UNITS         |
|--|--------------|--|-------|--------|----------|------------------------|---------------|
| Input Offset Voltage                           | $V_{OS}$     | $V_{CM} = 0\text{V}$   | +25°C |        | 0.6      | 4                      | mV            |
|  |              |  | Full  |        |          | 4.5                    |               |
| Input Bias Current                             | $I_B$        | $V_{CM} = 0\text{V}$   | +25°C |        | $\pm 20$ | $\pm 200$              | pA            |
| Input Offset Current                           | $I_{OS}$     | $V_{CM} = 0\text{V}$   | +25°C |        | $\pm 20$ | $\pm 200$              | pA            |
| Maximum Differential Input Voltage             | $ V_{ID} $   |  | Full  |        |          | $V_S$                  | V             |
| Maximum Input Difference Bias Current          | $ I_{ID} $   | $V_S = \pm 18\text{V}$ , $V_{ID} = \pm 18\text{V}$                   | +25°C |        | 2.2      | 4                      | $\mu\text{A}$ |
|  |              |  | Full  |        |          | 5                      |               |
| Input Common Mode Voltage Range <sup>(1)</sup> | $V_{CM}$     |  | Full  | $-V_S$ |          | $(+V_S) - 1.5\text{V}$ | V             |
| Common Mode Rejection Ratio                    | CMRR         | $V_S = \pm 18\text{V}$ , $V_{CM} = (-V_S)$ to $(+V_S) - 1.5\text{V}$ | +25°C | 90     | 116      |                        | dB            |
|  |              |  | Full  | 87     |          |                        |               |
| Power Supply Rejection Ratio                   | PSRR         | $V_S = 2.8\text{V}$ to $36\text{V}$                                  | +25°C | 96     | 116      |                        | dB            |
|  |              |  | Full  | 93     |          |                        |               |
| Output Voltage Swing from Rail                 | $V_{OH}$     | $I_{SOURCE} = 8\text{mA}$ , $V_{ID} = 0.2\text{V}$                   | +25°C |        | 370      | 500                    | mV            |
|  |              |  | Full  |        |          | 780                    |               |
|  | $V_{OL}$     | $I_{SINK} = 8\text{mA}$ , $V_{ID} = -0.2\text{V}$                    | +25°C |        | 210      | 280                    |               |
|  |              |  | Full  |        |          | 400                    |               |
| Output Short-Circuit Current                   | $I_{SOURCE}$ | $V_{OH} = (+V_S) - 1.5\text{V}$ , $V_{ID} = 0.2\text{V}$             | +25°C | 17     | 24       |                        | mA            |
|  | $I_{SINK}$   | $V_{OL} = (-V_S) + 1.5\text{V}$ , $V_{ID} = -0.2\text{V}$            | +25°C | 25     | 36       |                        |               |
| Total Supply Current                           | $I_S$        | $I_{OUT} = 0$  | +25°C |        | 420      | 500                    | $\mu\text{A}$ |
|  |              |  | Full  |        |          | 600                    |               |
| Voltage Reference                              | $V_{REF}$    | $V_S = 2.8\text{V}$ to $36\text{V}$ , $I_{REF} = 0$ to $5\text{mA}$  | +25°C | 1.205  | 1.225    | 1.245                  | V             |

**SWITCHING CHARACTERISTICS**(At  $T_A = +25^\circ\text{C}$ ,  $V_S = \pm 2.5\text{V}$ ,  $C_L = 15\text{pF}$  <sup>(2)</sup>, unless otherwise noted.)







| PARAMETER                       | SYMBOL     | CONDITIONS        | TEMP  | MIN | TYP | MAX | UNITS |
|---------------------------------|------------|-------------------|-------|-----|-----|-----|-------|
| Propagation Delay (High to Low) | $t_{PHL}$  | Overdrive = 10mV  | +25°C |     | 85  |     | ns    |
|                                 |            | Overdrive = 100mV | +25°C |     | 50  |     |       |
| Propagation Delay (Low to High) | $t_{PLH}$  | Overdrive = 10mV  | +25°C |     | 95  |     | ns    |
|                                 |            | Overdrive = 100mV | +25°C |     | 60  |     |       |
| Fall Time                       | $t_{FALL}$ | Overdrive = 10mV  | +25°C |     | 12  |     | ns    |
|                                 |            | Overdrive = 100mV | +25°C |     | 12  |     |       |
| Rise Time                       | $t_{RISE}$ | Overdrive = 10mV  | +25°C |     | 12  |     | ns    |
|                                 |            | Overdrive = 100mV | +25°C |     | 12  |     |       |

## NOTES:

- Any input voltage should not be lower than  $(-V_S) - 0.3\text{V}$ . The maximum input common mode voltage is  $(+V_S) - 1.5\text{V}$ , but it will not be damaged when the upper limit of the input voltage reaches  $36\text{V}$ .
- $C_L$ : Load capacitance (jig and probe included).







TYPICAL PERFORMANCE CHARACTERISTICS

At  $T_A = +25^\circ\text{C}$ ,  $V_S = \pm 18\text{V}$  and  $C_L = 15\text{pF}$ , unless otherwise noted.

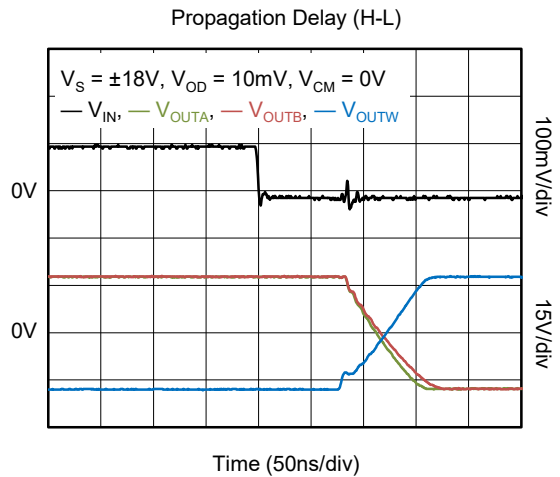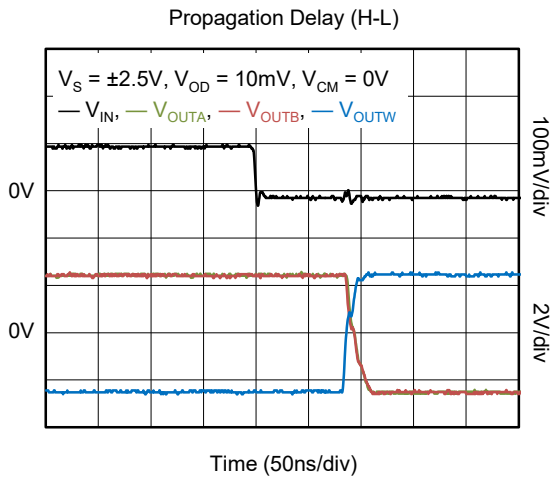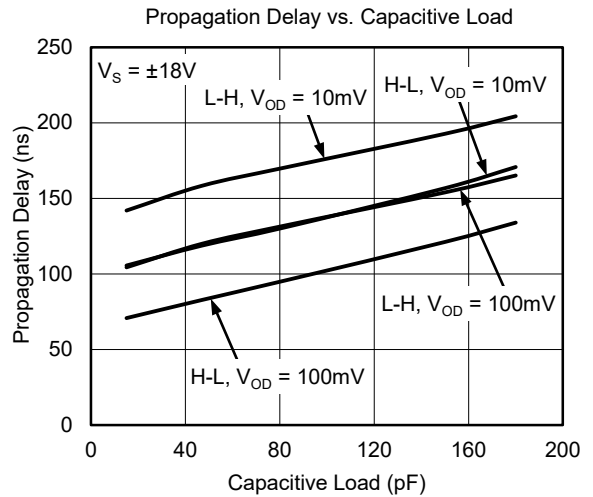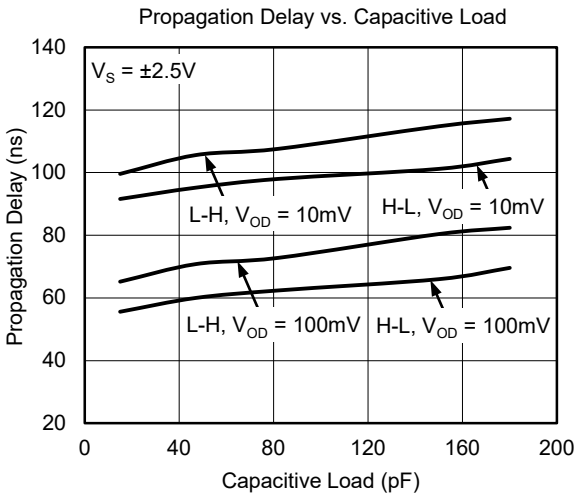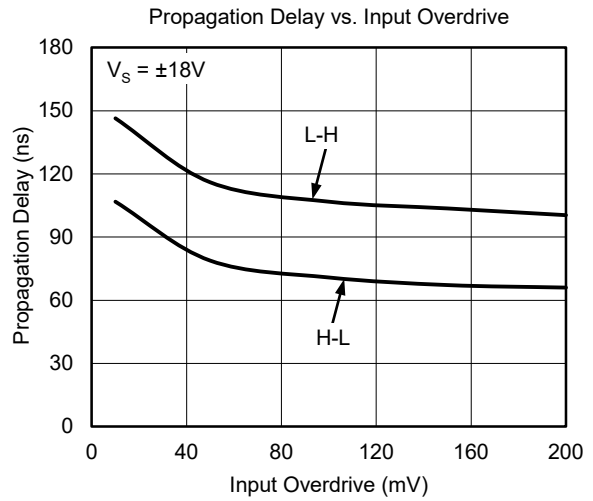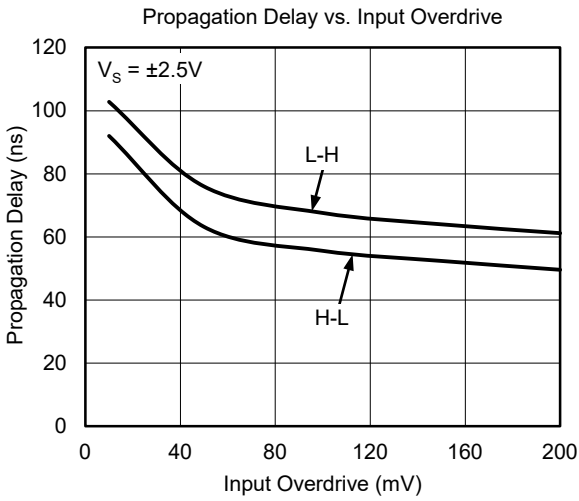







TYPICAL PERFORMANCE CHARACTERISTICS (continued)

At  $T_A = +25^\circ\text{C}$ ,  $V_S = \pm 18\text{V}$  and  $C_L = 15\text{pF}$ , unless otherwise noted.

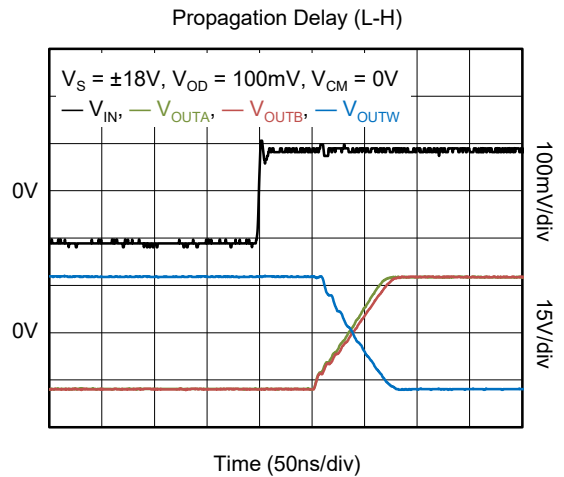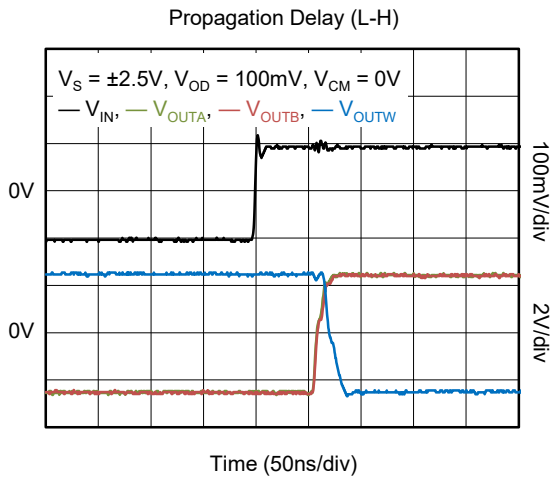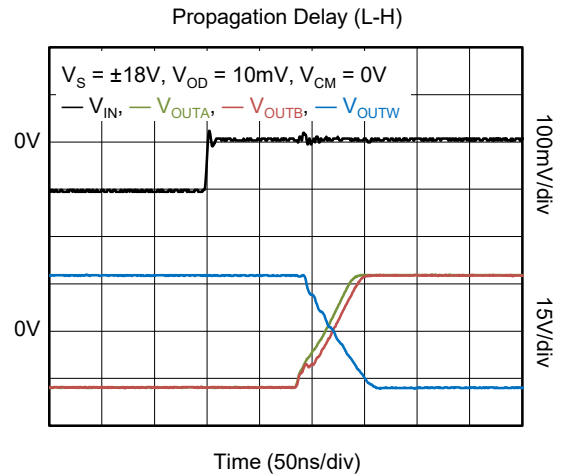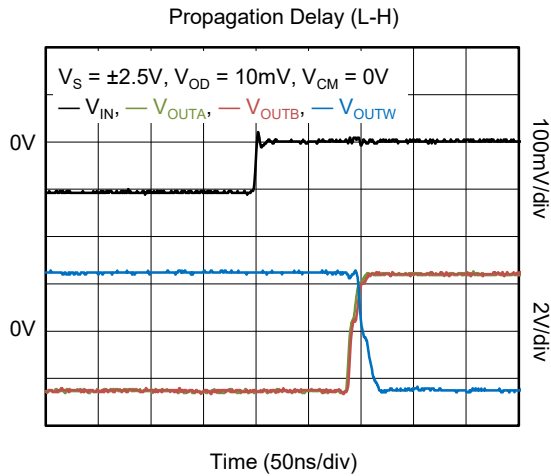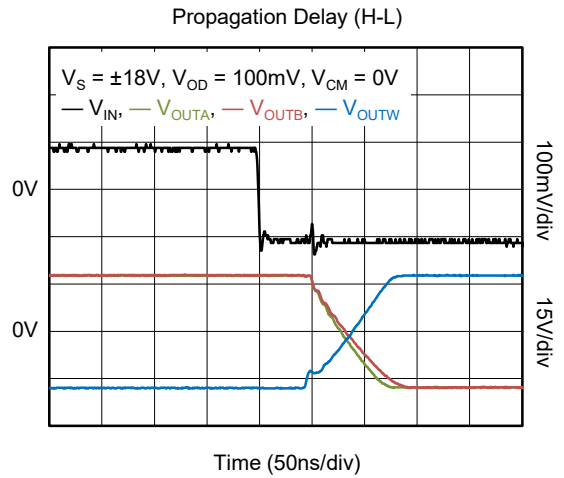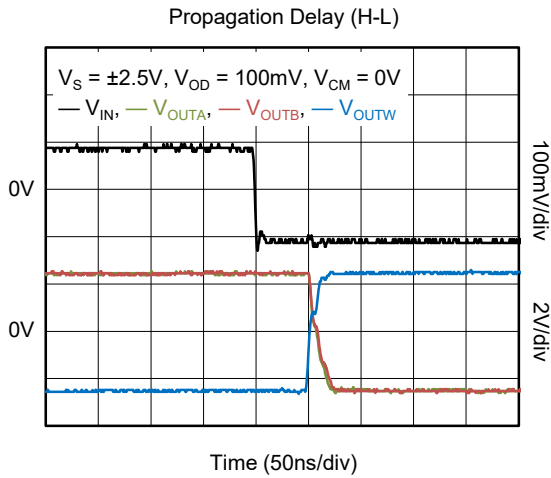


TYPICAL PERFORMANCE CHARACTERISTICS (continued)

At  $T_A = +25^\circ\text{C}$ ,  $V_S = \pm 18\text{V}$  and  $C_L = 15\text{pF}$ , unless otherwise noted.

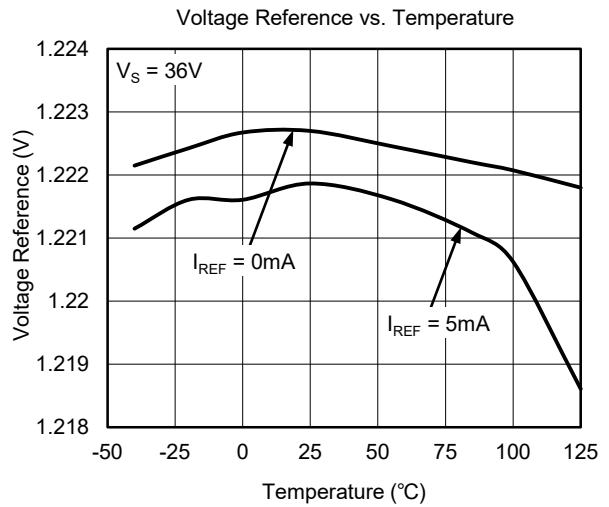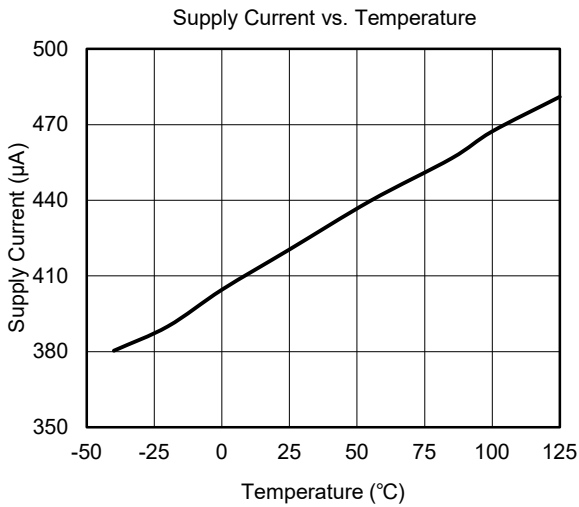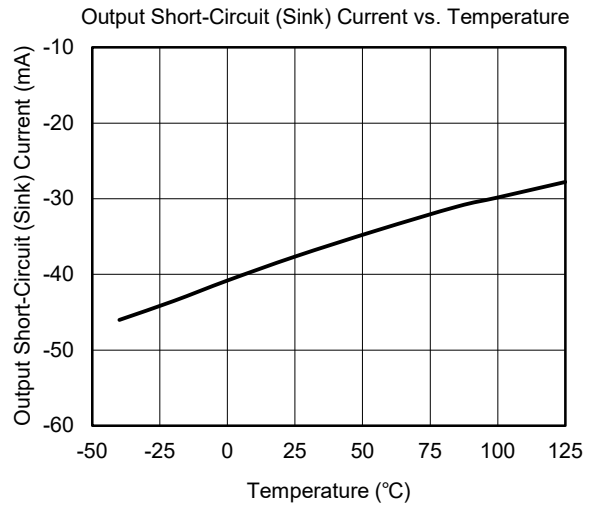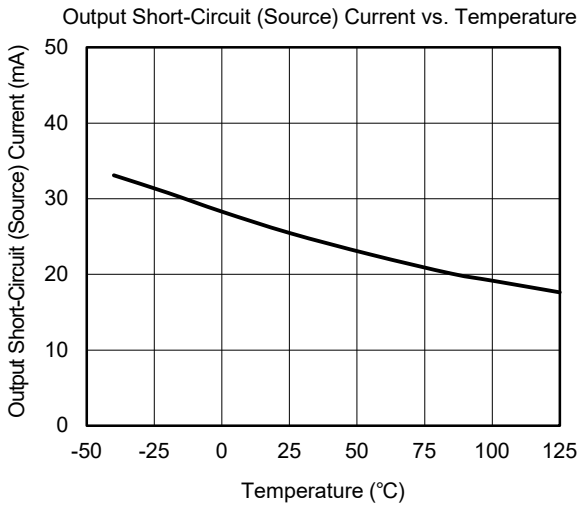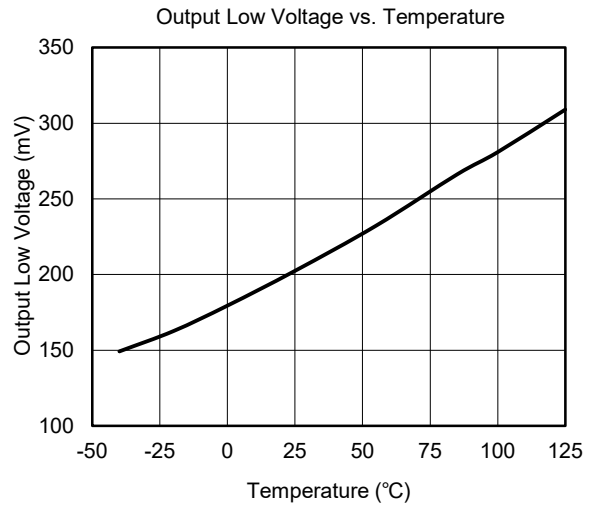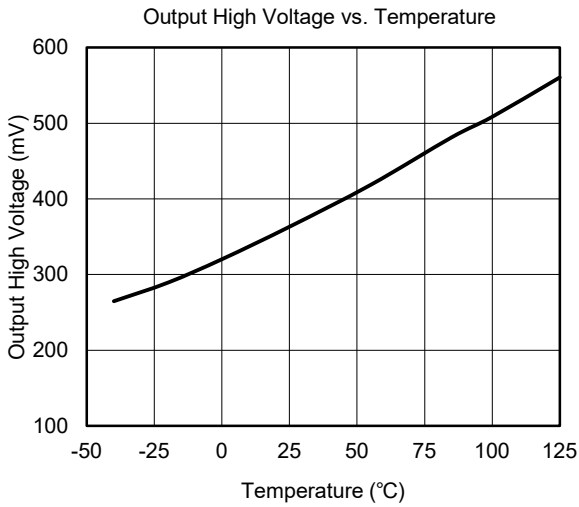

**TYPICAL PERFORMANCE CHARACTERISTICS (continued)**

At  $T_A = +25^\circ\text{C}$ ,  $V_S = \pm 18\text{V}$  and  $C_L = 15\text{pF}$ , unless otherwise noted.

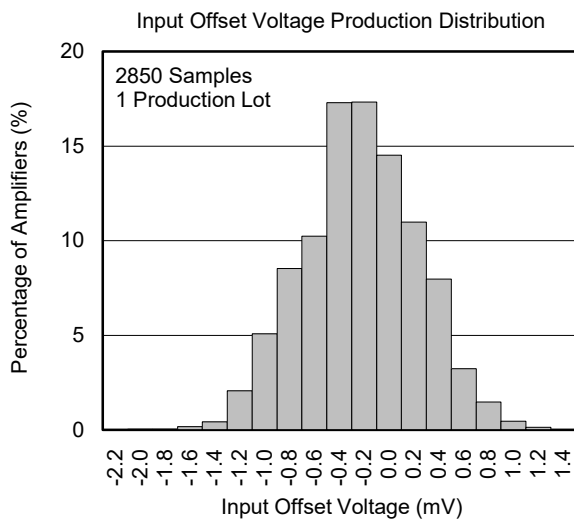



**DETAILED DESCRIPTION**

The SGM8772 is dual, high precision, low power comparator. The wide input voltage range and power supply range make the device a good choice for industrial equipment. Push-pull structure saves external pull-up resistors. The SGM8772 can be compatible with CMOS and TTL logics.

**Output Structure**

In Figure 1, the SGM8772 has a push-pull output stage. When output is changed from logic high/low to low/high, the changed sink/source current pulls/pushes output pin to logic low/high. Beginning this transition, larger sink/source current is used to create a high slew rate transit from high/low to low/high. Once the output voltage reaches  $V_{OL}/V_{OH}$ , it will reduce the sink/source current to a just right value to maintain the  $V_{OL}/V_{OH}$  static condition. This current-driven push-pull output stage will significantly reduce the power consumption in application system. OUTA, OUTB and NAND gate form the third window comparator output.

If low slew rate transition is needed in system design, adjusting the load capacitance will change the slew rate. The heavier capacitive load will slow down the output voltage transition. This feature will be used to reduce the interference generated by fast edge of transition between 1 and 0 in noise-sensitive system.

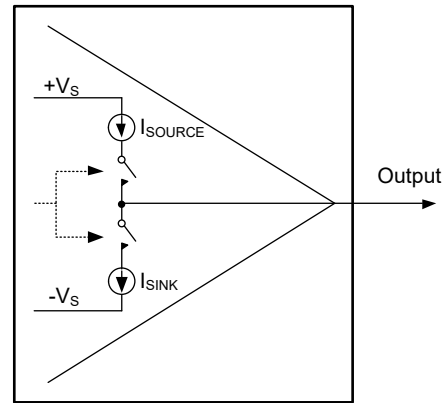


Figure 1. Push-Pull Output Structure

**APPLICATION INFORMATION**

**Window Comparator**

It's easy to design a window comparator by using SGM8772, and this design is shown in Figure 2.

**Layout and Bypassing**

Good power supply decoupling, layout and grounding are very important for SGM8772 to realize the full high-speed capabilities in system, following skills will be used:

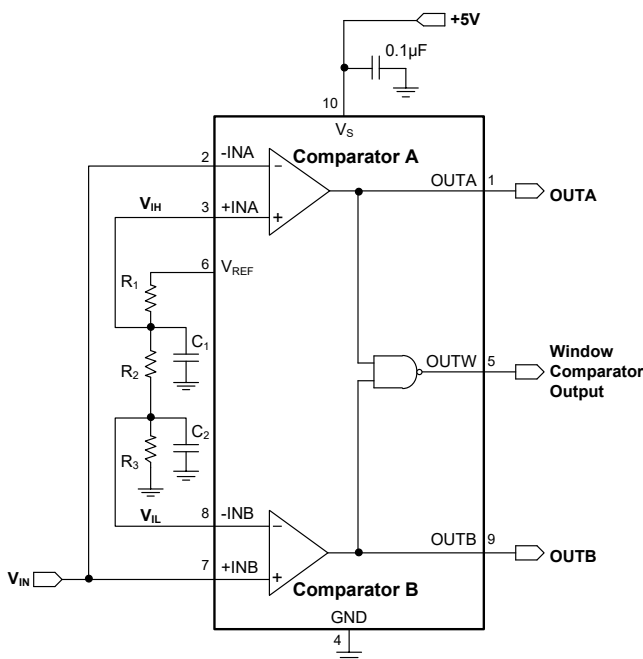


Figure 2. Window Comparator

- ◆ A 0.1µF to 4.7µF range ceramic capacitor is used to provide good power supply decoupling. This ceramic capacitor must be placed as close to  $V_S$  pin as possible.

- ◆ For grounding, unbroken and low-inductance ground plane is a good choice.

- ◆ For Layout, use short PCB trace to avoid unwanted parasitic feedback around the comparator. SGM8772 must be soldered directly to the PCB and the socket is not recommended.

**REVISION HISTORY**


NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

| <b>Changes from Original (DECEMBER 2019) to REV.A</b> | <b>Page</b> |
|---|-------------|
| Changed from product preview to production data.....  | All         |


---

PACKAGE OUTLINE DIMENSIONS

MSOP-10

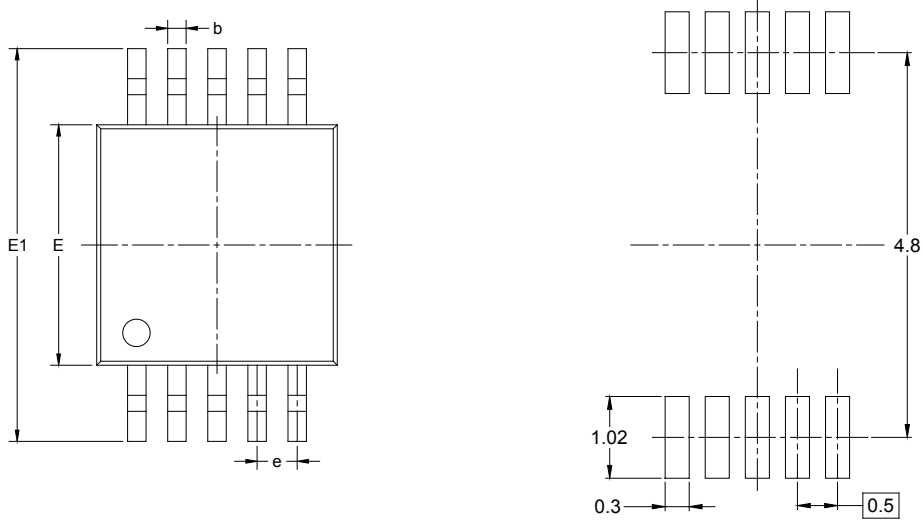

RECOMMENDED LAND PATTERN (Unit: mm)

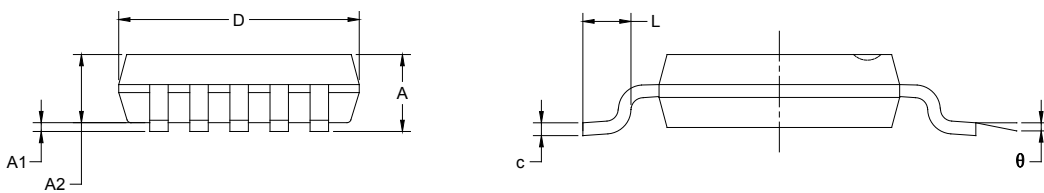

| Symbol | Dimensions<br>In Millimeters |       | Dimensions<br>In Inches |       |
|--------|------------------------------|-------|-------------------------|-------|
|        | MIN                          | MAX   | MIN                     | MAX   |
| A      | 0.820                        | 1.100 | 0.032                   | 0.043 |
| A1     | 0.020                        | 0.150 | 0.001                   | 0.006 |
| A2     | 0.750                        | 0.950 | 0.030                   | 0.037 |
| b      | 0.180                        | 0.280 | 0.007                   | 0.011 |
| c      | 0.090                        | 0.230 | 0.004                   | 0.009 |
| D      | 2.900                        | 3.100 | 0.114                   | 0.122 |
| E      | 2.900                        | 3.100 | 0.114                   | 0.122 |
| E1     | 4.750                        | 5.050 | 0.187                   | 0.199 |
| e      | 0.500 BSC                    |       | 0.020 BSC               |       |
| L      | 0.400                        | 0.800 | 0.016                   | 0.031 |
| θ      | 0°                           | 6°    | 0°                      | 6°    |

**TAPE AND REEL INFORMATION**

**REEL DIMENSIONS**



**TAPE DIMENSIONS**



NOTE: The picture is only for reference. Please make the object as the standard.

**KEY PARAMETER LIST OF TAPE AND REEL**

| Package Type | Reel Diameter | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P0 (mm) | P1 (mm) | P2 (mm) | W (mm) | Pin1 Quadrant |
|--------------|---------------|--------------------|---------|---------|---------|---------|---------|---------|--------|---------------|
| MSOP-10      | 13"           | 12.4               | 5.20    | 3.30    | 1.20    | 4.0     | 8.0     | 2.0     | 12.0   | Q1            |

000001

# PACKAGE INFORMATION

## CARTON BOX DIMENSIONS



NOTE: The picture is only for reference. Please make the object as the standard.

## KEY PARAMETER LIST OF CARTON BOX

| Reel Type | Length (mm) | Width (mm) | Height (mm) | Pizza/Carton |
|-----------|-------------|------------|-------------|--------------|
| 13"       | 386         | 280        | 370         | 5            |

DD0002