

P-Channel Power MOSFET**描述 / Descriptions**

SOT23 塑封封装 P 道 MOS 场效应管。P- CHANNEL MOSFET in a SOT23 Plastic Package.

特征 / Features

$V_{DS}(V) = -30V$

$I_D = -4.2 A (V_{GS} = -10V)$

$R_{DS(ON)} < 60m\Omega (V_{GS} = -10V)$



$R_{DS(ON)} < 70m\Omega (V_{GS} = -4.5V)$

$R_{DS(ON)} < 85m\Omega (V_{GS} = -2.5V)$

用途 / Applications

适用于作负载开关或脉宽调制应用。

This device is suitable for use as a load switch or in PWM applications.

内部等效电路 / Equivalent Circuit**引脚排列 / Pinning**

PIN1 : S

PIN 2 : G

PIN 3 : D

印章代码 / Marking

Marking	
---------	--

P-Channel Power MOSFET

极限参数 / Absolute Maximum Ratings(Ta=25°C)

参数 Parameter	符号 Symbol	数值 Rating	单位 Unit
Drain-Source Voltage	V_{DS}	-30	V
Drain Current – Continuous	I_D	-4.2	A
Drain Current- Continuous ^A	$I_D(T_a=70^{\circ}\text{C})$	-3.5	A
Pulsed Drain Current ^B	I_{DM}	-28	A
Gate-Source Voltage	V_{GS}	± 12	V
Total Power Dissipation ^A	P_D	1.4	W
Total Power Dissipation ^A	$P_D(T_a=70^{\circ}\text{C})$	1.0	W
Operating and Storage Junction Temperature Range	T_J, T_{STG}	-55 to 150	$^{\circ}\text{C}$
Maximum Junction-to-Ambient ^A	$R_{\theta JA}$	125	$^{\circ}\text{C/W}$
Maximum Junction-to-Lead ^C	$R_{\theta JL}$	60	$^{\circ}\text{C/W}$

电性能参数 / Electrical Characteristics(Ta=25°C)

参数 Parameter	符号 Symbol	测试条件 Test Conditions	最小值 Min	典型值 Typ	最大值 Max	单位 Unit
Drain–Source Breakdown Voltage	BV_{DSS}	$V_{GS}=0V$ $I_D=-250\mu A$	-30			V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=-24V$ $V_{GS}=0V$			-1	μA
		$V_{DS}=-24V$ $V_{GS}=0V$ $T_J=55^{\circ}\text{C}$			-5	μA
Gate–Body Leakage	I_{GSS}	$V_{GS}=\pm 12V$ $V_{DS}=0V$			± 0.1	μA
On–State Drain Current	$I_{D(on)}$	$V_{GS}=-4.5V$ $V_{DS}=-5V$	-25			A
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}$ $I_D=-250\mu A$	-0.7	-0.9	-1.2	V
Static Drain–Source On–Resistance	$R_{DS(on)(1)}$	$V_{GS}=-10V$ $I_D=-4.2A$		52	60	m Ω
	$R_{DS(on)(2)}$	$V_{GS}=-10V$ $I_D=-4.2A$ $T_J=125^{\circ}\text{C}$			75	
	$R_{DS(on)(3)}$	$V_{GS}=-4.5V$ $I_D=-4A$		60	70	
	$R_{DS(on)(4)}$	$V_{GS}=-2.5V$ $I_D=-1A$		75	85	
Forward Transconductance	g_{FS}	$V_{DS}=-5V$ $I_D=-5A$	4	8		S
Drain–Source Diode Forward Voltage	V_{SD}	$V_{GS}=0V$ $I_S=-1A$		-0.75	-1.0	V

P-Channel Power MOSFET

电性能参数 / Electrical Characteristics($T_A=25^{\circ}\text{C}$)

参数 Parameter	符号 Symbol	测试条件 Test Conditions	最小值 Min	典型值 Typ	最大值 Max	单位 Unit
Input Capacitance	C_{iss}	$V_{DS}=-15\text{V}$ $V_{GS}=0\text{V}$ $f=1\text{MHz}$		957		pF
Output Capacitance	C_{oss}			115		
Reverse Transfer Capacitance	C_{rss}			77		
Turn-On Delay Time	$t_{d(on)}$	$V_{GS}=-10\text{V}$ $R_L=3.6\Omega$ $V_{DS}=-15\text{V}$ $R_{GEN}=6\Omega$		6.3		ns
Turn-On Rise Time	t_r			3.2		
Turn-Off Delay Time	$t_{d(off)}$			38.2		
Turn-Off Fall Time	t_f			12		

A: The value of $R_{\theta JA}$ is measured with the device mounted on 1in² FR-4 board with 2oz. Copper, in a still air environment with $T_A=25^{\circ}\text{C}$. The value in any given application depends on the user's specific board design. The current rating is based on the $t \leq 10\text{s}$ thermal resistance rating.

B: Repetitive rating, pulse width limited by junction temperature.







C. The $R_{\theta JA}$ is the sum of the thermal impedance from junction to lead $R_{\theta JL}$ and lead to ambient.

D. The static characteristics in Figures 1 to 6,12,14 are obtained using 80 μs pulses, duty cycle 0.5% max.

E. These tests are performed with the device mounted on 1 in² FR-4 board with 2oz. Copper, in a still air environment with $T_A=25^{\circ}\text{C}$. The SOA curve provides a single pulse rating.


P-Channel Power MOSFET

电参数曲线图 / Electrical Characteristic Curve

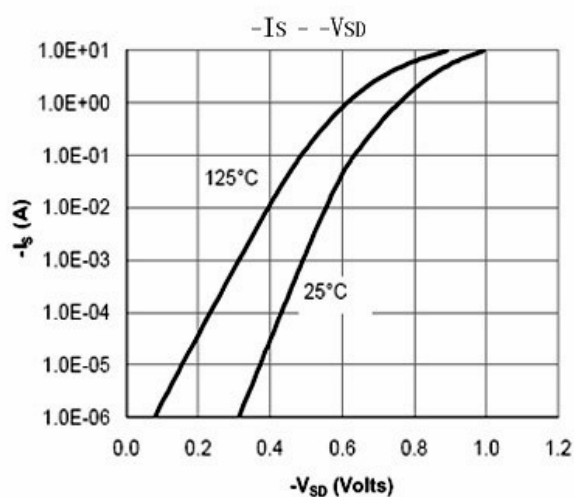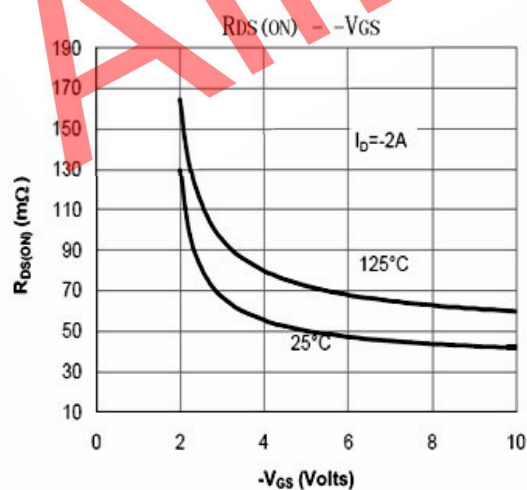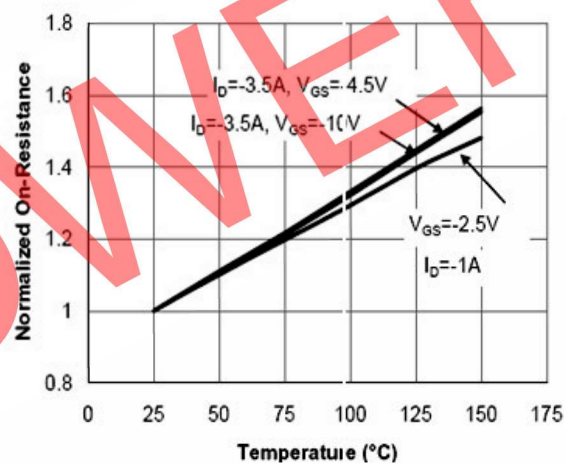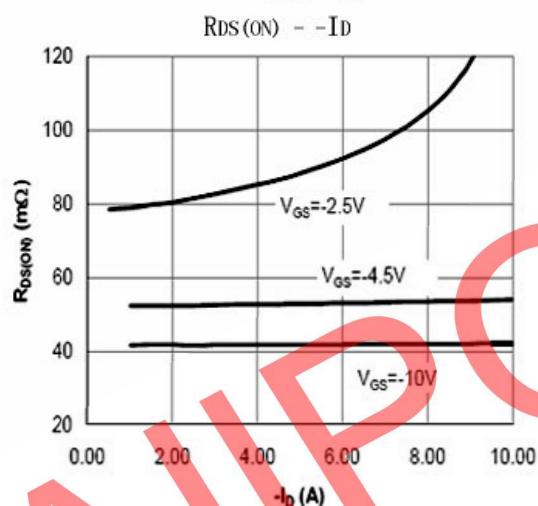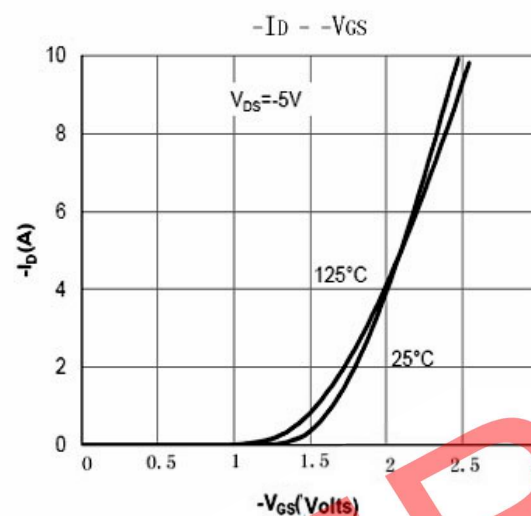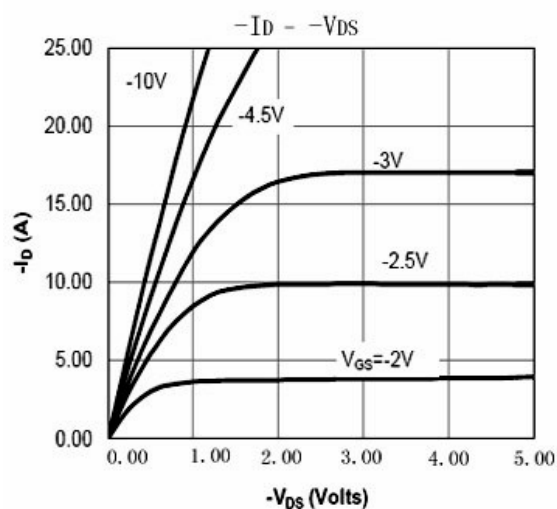

P-Channel Power MOSFET

电参数曲线图 / Electrical Characteristic Curve

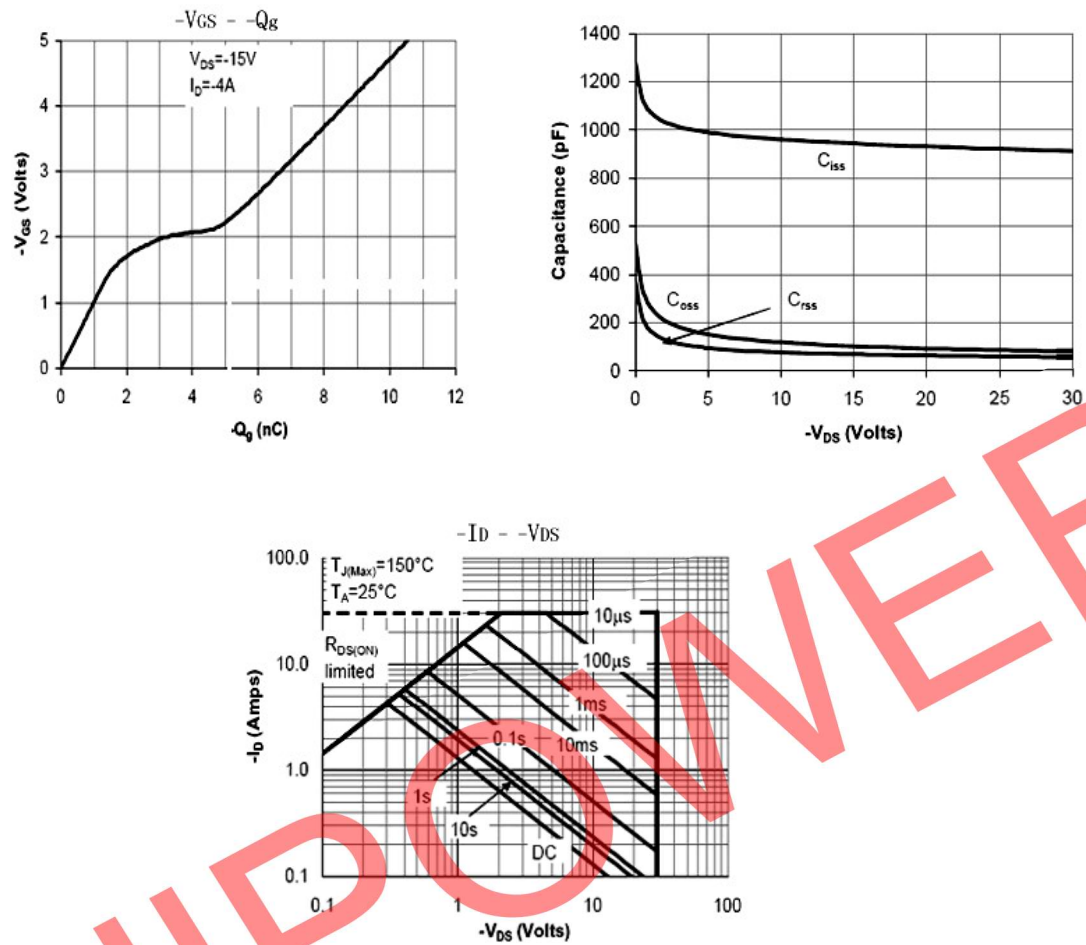


P-Channel Power MOSFET

外形尺寸图 / Package Dimensions

SOT-23


单位: mm

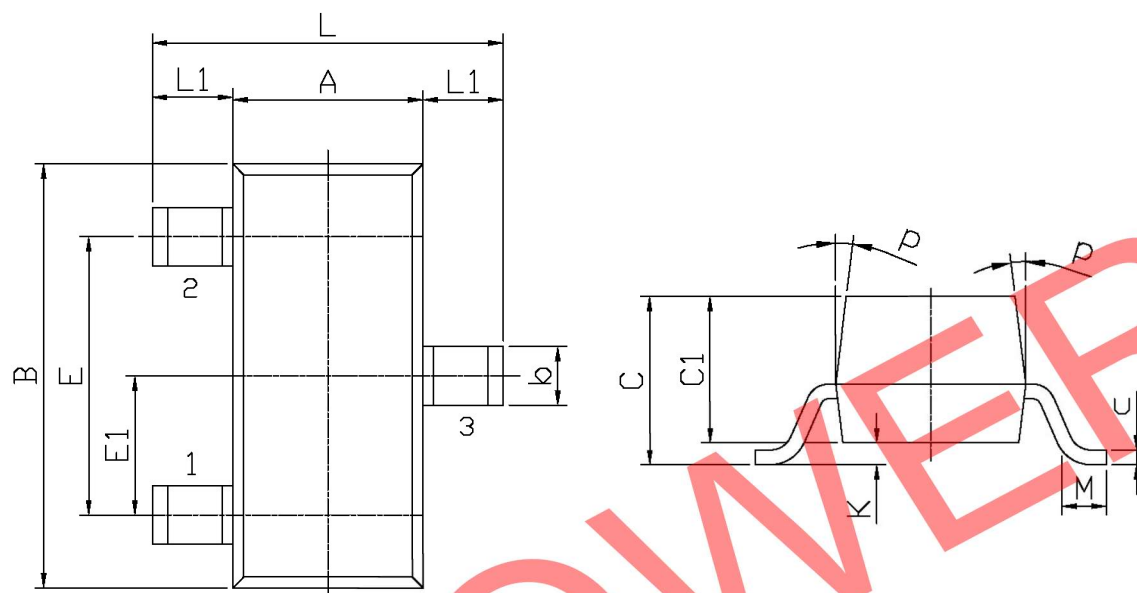

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
L	2.2	2.7	C	1.30Max	
L1	0.45	0.65	C1	0.90	1.20
A	1.15	1.50	c	0.05	0.20
B	2.70	3.10	K	0	0.10
E	1.70	2.10	M	0.20MIN	
E1	0.85	1.05	P	7°	
b	0.35	0.55			

P-Channel Power MOSFET

回流焊温度曲线图(无铅) / Temperature Profile for IR Reflow Soldering(Pb-Free)

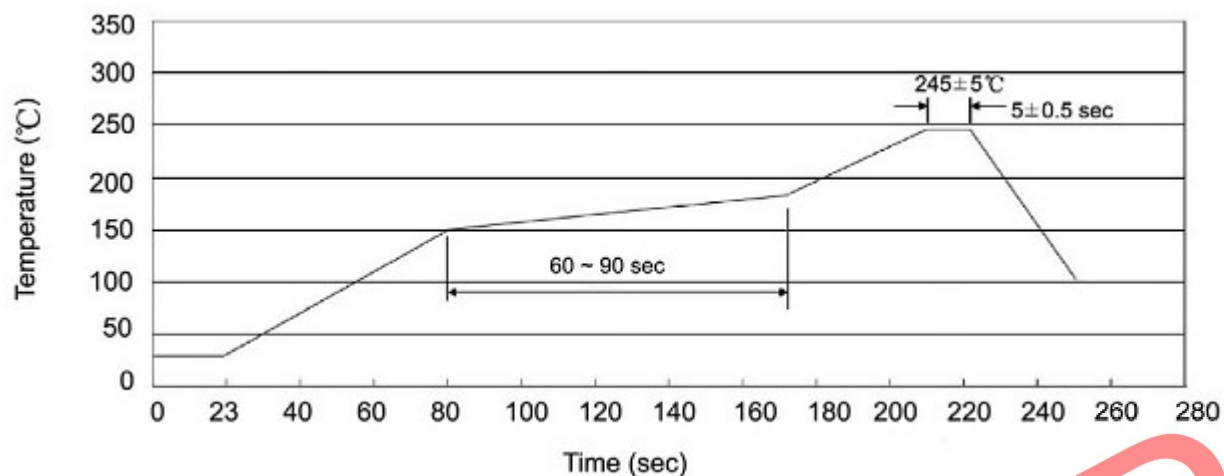

说明：

- 1、预热温度 25 ~ 150°C，时间 60 ~ 90sec;
- 2、峰值温度 245±5°C，时间持续为 5±0.5sec;
- 3、焊接制程冷却速度为 2 ~ 10°C/sec.

Note:

- 1.Preheating:25~150°C, Time:60~90sec.
- 2.Peak Temp.:245±5°C, Duration:5±0.5sec.
3. Cooling Speed: 2~10°C/sec.

耐焊接热试验条件 / Resistance to Soldering Heat Test Conditions

温度：260±5°C

时间：10±1 sec.

Temp.:260±5°C

Time:10±1 sec

包装规格 / Packaging SPEC.

卷盘包装 / REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-23-3	3,000	10	30,000	4	120,000	7" ×8	210×205×205	445×230×435

使用说明 / Notices